
# newhey

Stock Collection

# Natural Wool & Natural Earth

Manufactured using 100% undyed wools




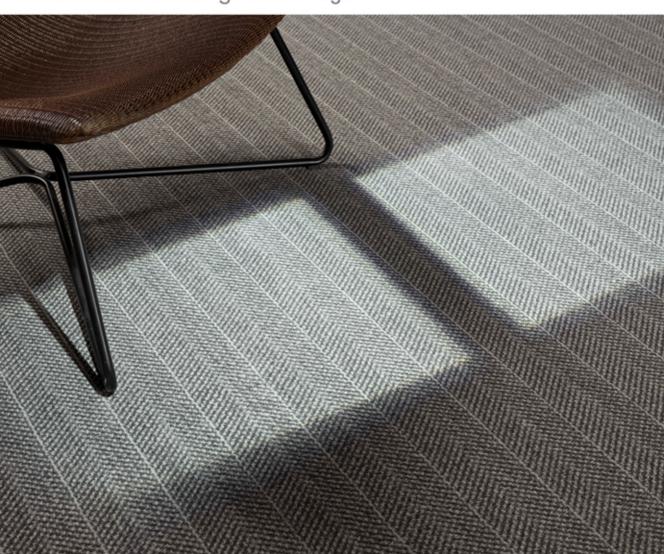





Manufactured using 100% undyed wools

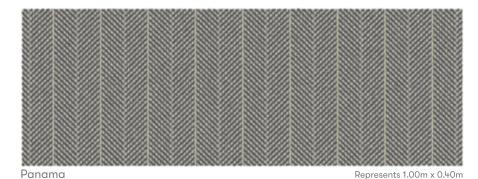









# GRAPHICS TUFTED | GT1350

Prod			

GT1350		
Graphics Tufted		
Cut Pile Tufted Carpet		
80% Wool / 20% Nylon		
U.K.		

	Metric	Imperial	Tolerance
Yarn Count	R560/2	2/55's	
Machine Gauge	31.5/dm	8 per inch	
Pile Height above Back	7.0mm	0.28"	±10%
Total Carpet Thickness	9.0mm	0.39"	±10%
Total Pile Weight	1350g/m²	39.83oz/yd²	±10%
Total Carpet Weight	2020g/m²	59.59oz/yd²	±10%
Product Width	4.00m		±1.25%
Backing Materials	Woven Polyester FV	A (ethulene vinul acetate) evol	nac: 100% recucled PE

Backing Materials

Woven Polyester, EVA (ethylene vinyl acetate), evobac; 100% recycled PETPost consumer plastic evobac

#### Performance Classification

Performance BS EN 1307	Class 33; Heavy Commercial Use	_
Luxury Class	LC4	

## **E.U Flammability Classification**

Lio i idililiability Cidssification		
BS EN 13501-1	Cfl-s1	

### Colour Fastness

Light	Minimum 5	
Shampooing	Minimum 4	
Water	Minimum 4	
Rubbing	Minimum 4	

#### Installation Methods

Carpet should be installed in accordance with Newhey installation specifications. This may vary subject to type of installation and site conditions. For guidance and advice please contact a Newhey representative.

#### Maintenance

Proper maintenance and care is critical to the long term performance of any carpet and should be written in to the specification of a project. For guidance and advice please contact a Newhey representative,

Newhey Carpets reserve the right to change specification and construction materials due to raw material shortages or for the purpose of product improvements. All specifications are subject to normal manufacturing tolerances. Due lots may vary from batch to batch.









